

LANDSCAPE BLOCK 6' - STANDARD


TOP VIEW

SECTION VIEW

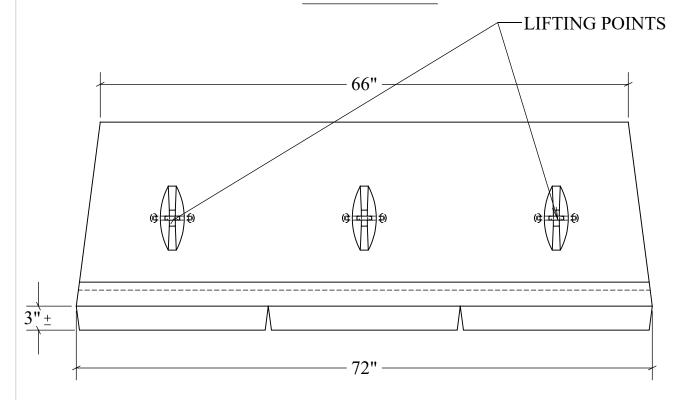

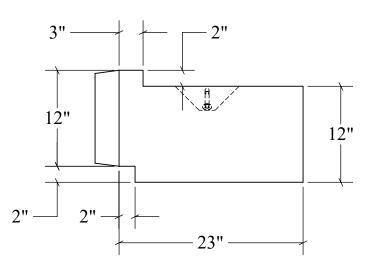

END VIEW

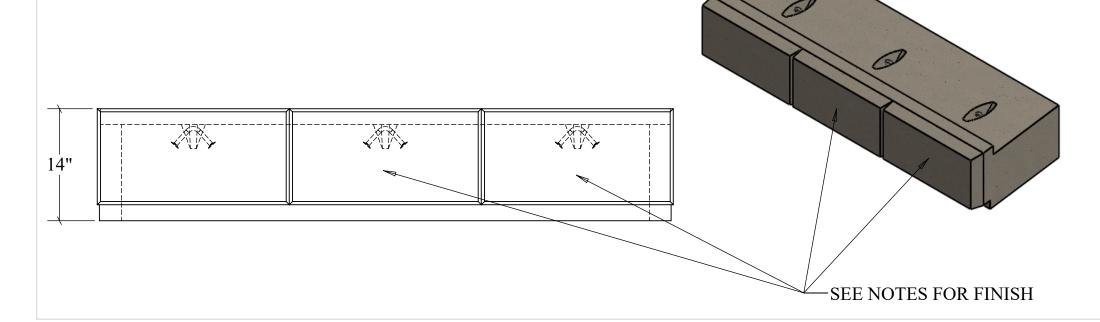

STRUCTURAL NOTES:

- 1. ALL CONCRETE SHALL BE PLACED IN A SINGLE CONTINUOUS OPERATION (MONOLITHIC POUR).
- 2. CONCRETE SHALL HAVE A MINIMUM 28-DAY COMPRESSIVE STRENGTH OF 4000 PSI CONCRETE AGGREGATE SHALL CONFORM TO ASTM C33.
- 3. CEMENT SHALL CONFORM TO ASTM C150, TYPE I, II, OR III.
- 4. NON-REINFORCED CONCRETE.

QUARRY STONE FACE SAMPLE FINISH



| DRAWN: | WEIGHT: | SCALE: |
|------------------------------------|----------------------------|---|
| 08/11/21 | 1,880 LBS. | VARIES |
| MATERIAL: 4,000 PSI CONCRETE | FINISH: FORM FINISH | DIMENSIONS ARE IN FEET & INCHES TOLERANCES: ± 4-IN. |



PRECISION PRECAST

575-382-0501

SALES@PRECISIONPRECAST.CO WWW.PRECISIONPRECAST.CO

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LECO INDUSTRIES INC DBA PRECISION PRECAST. ANY REPRODUCTION PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION OF LECO INDUSTRIES, INC DBA PRECISION PRECAST IS PROHIBITED.