



Ø 24" I.D. RISER



TOP VIEW

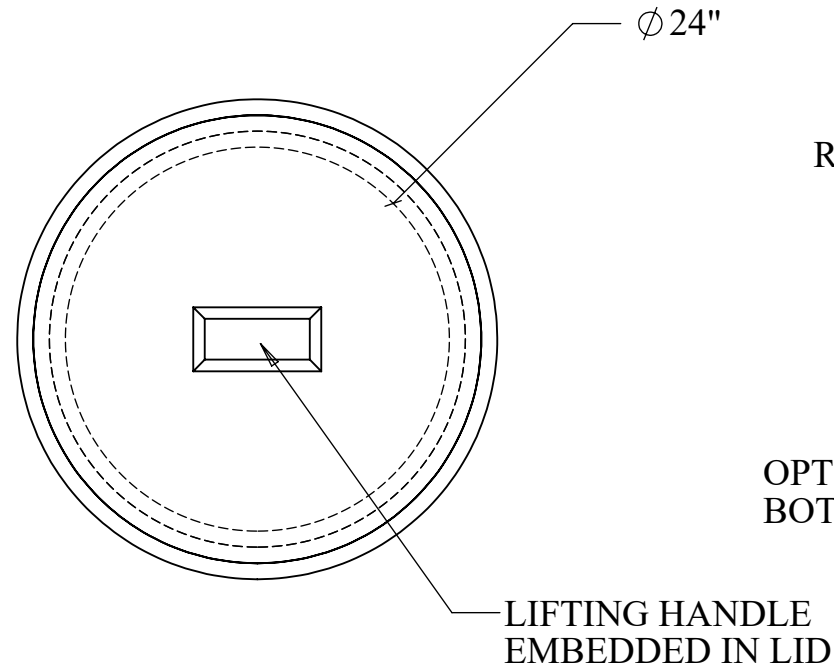

END VIEW

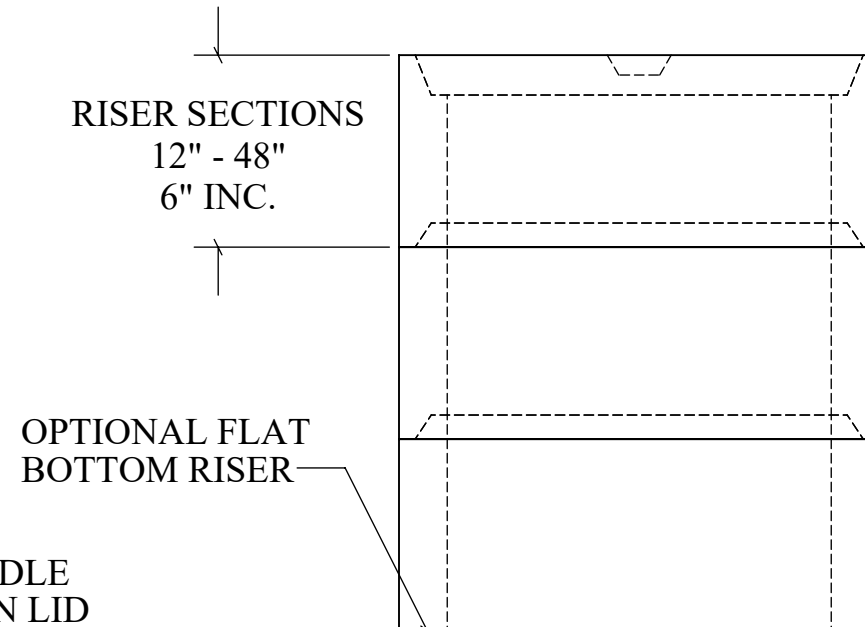

SECTION VIEW

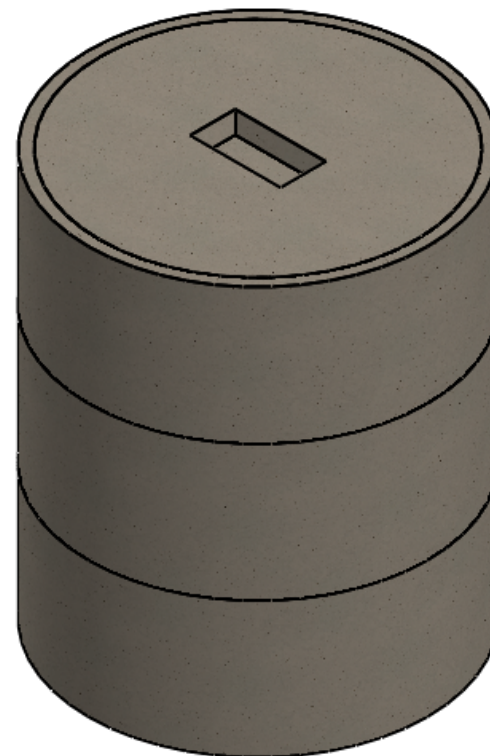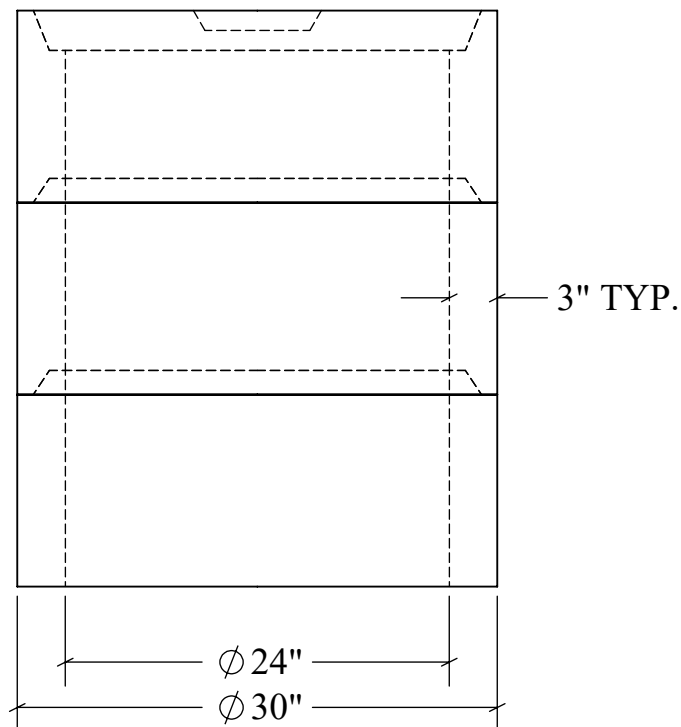

STRUCTURAL NOTES:

1. ALL CONCRETE SHALL BE PLACED IN A SINGLE CONTINUOUS OPERATION (MONOLITHIC POUR).
2. CONCRETE SHALL HAVE A MINIMUM 28-DAY COMPRESSIVE STRENGTH OF 4000 PSI. CONCRETE AGGREGATE SHALL CONFORM TO ASTM C33
3. CEMENT SHALL CONFORM TO ASTM C150, TYPE I, II, OR III.
4. ALL STEEL REINFORCEMENT SHALL BE PLACED AS PER ACI 318-89.
5. ENGINEERED AND DESIGNED FOR 300 PSF. LOAD.

| | | |
|---|-------------------------------|---|
| DRAWN: 05/05/23 | WEIGHT: VARIES | SCALE: VARIES |
| MATERIAL: 4,000 PSI CONCRETE | FINISH: FORM FINISH | DIMENSIONS ARE IN FEET & INCHES TOLERANCES: ± 4-IN. |



PRECISION PRECAST
575-382-0501
SALES@PRECISIONPRECAST.CO
WWW.PRECISIONPRECAST.CO

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LECO INDUSTRIES INC DBA PRECISION PRECAST. ANY REPRODUCTION PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION OF LECO INDUSTRIES, INC DBA PRECISION PRECAST IS PROHIBITED.